




Family: Maribella | Item No. 4764 RY

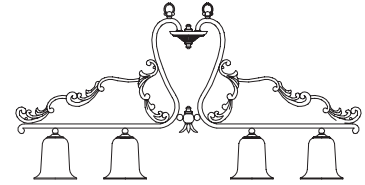

Drawing 1 - Fixture Assembly

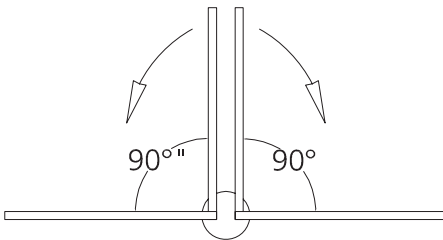

Drawing 2 - Glass Installation

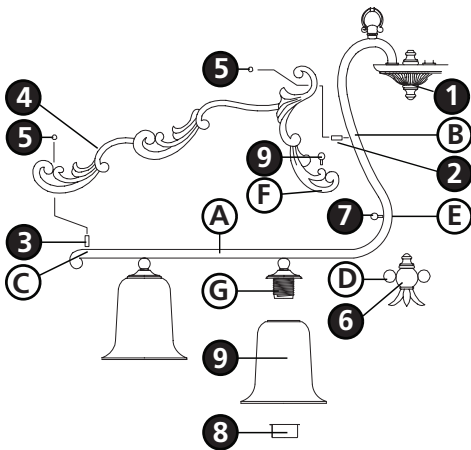

## ▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first assembling the main body of the fixture, installing the mounting hardware, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the glass.**

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

2

1. To assemble fixture, fold out arms (A) of fixture 90 degrees until they form a straight line - see **Drawing 1**.
2. Thread stud (2) into fixture arm (A) at location (B) approximately 1/8" - see **Drawing 2**.
3. Thread stud (3) into fixture arm (A) at location (C) approximately 1/8".
4. Slip scroll (4) onto studs (2) and (3).
5. Secure scroll (4) by threading ball knobs (5) onto the end of studs (2) and (3).
6. Align hole (D) in center ball assembly (6) with hole (E) in fixture arm (A).
7. Slip long ball knob screw (7) through hole (E) and thread into hole (D) and repeat for other side.
8. Slip ball knob screw (9) through hole (F) in scroll (4) and thread into arm (A).
9. Please refer to the hanging instruction sheet (I.S. 19-75) provided to hang fixture. Then refer back to this sheet to install glass.

3

1. To install glass, remove socket ring (8) from socket (G) - see **Drawing 2**.
2. Slip glass (9) over socket (G).
3. Thread socket ring (8) back onto socket (G) and tighten to secure glass.
4. Fixture can now be lamped accordingly.

Note: Maximum wattage for 4764 fixture is 75 watts per bulb.

4.21.08