

CARABEL

FR57672BCH



Bulbs: 100W MED.

ASSEMBLY INSTRUCTIONS

Assembly of this fixture will be accomplished by first installing the mounting strap to the junction box, making all necessary electrical connections, mounting the fixture to the wall, and then installing the glass.

SAFETY WARNING: Read wiring and grounding instructions [FRIS 18] and any additional directions. Turn power supply off during installation. If new wiring is required, consult a qualified electrician or local authorities for code requirements.


STEP 1

- 1 Prepare mounting strap (a) by threading the two 1 1/4" long mounting screws (b) into the back of the mounting strap (a), making sure the holes into which the screws are threaded match the spacing of holes (d) in the backplate (e) - See Drawing 1.
- 2 Attach mounting strap (a) to junction box (j) using two screws (c).
- 3 Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet [FRIS 18] and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.
- 4 To mount fixture, slip the two mounting screws (b) through the two mounting holes (d) in the backplate (e).
- 5 While holding fixture in place, thread the two ball knobs (f) on to the end of the mounting screws (b), and tighten.


STEP 2

- 1 To install glass, remove socket ring (1) and spacer (2) from socket (3) - See Drawing 2.
- 2 Slip glass (4) over socket (3).
- 3 Slip spacer (2) over socket (3) and then thread on the socket ring (1) to secure the glass. Use caution not to over tighten the socket ring, over tightening may cause damage.

[DRAWING 1]

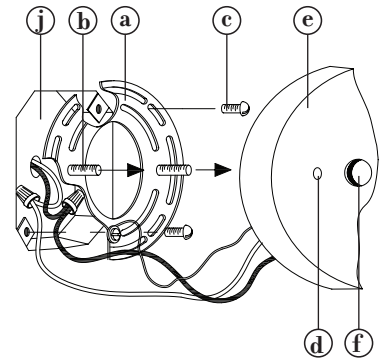

[DRAWING 2]

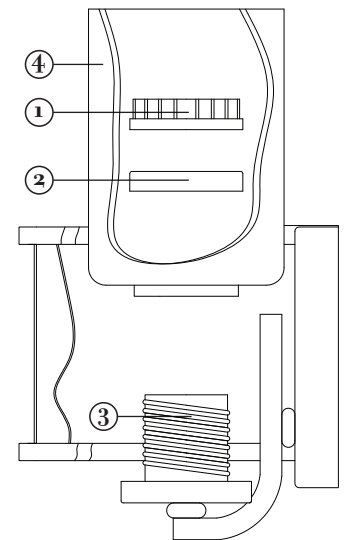

FREDRICK RAMOND

ESTABLISHED 1965

800.421.3517 WWW.FREDRICKRAMOND.COM

6.11.10