


CARABEL

FR57673BCH

Bulbs: 100W MED.



[DRAWING 1]

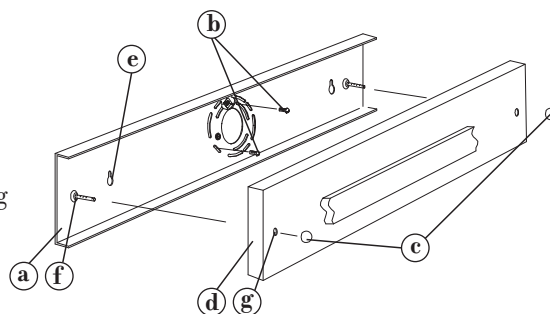

ASSEMBLY INSTRUCTIONS


Assembly of this fixture will be accomplished by first installing the mounting strap to the junction box, making all necessary electrical connections, mounting the fixture to the wall, and then installing the glass.

SAFETY WARNING: Read wiring and grounding instructions [FRIS 18] and any additional directions. Turn power supply off during installation. If new wiring is required, consult a qualified electrician or local authorities for code requirements.

STEP 1

- 1 Remove ball knobs (c) from fixture - See Drawing 1.
- 2 Remove retainer plate (a) from backplate (d).
- 3 Attach retainer plate (a) to junction box (j) using screws (b).
- 4 Additional screws (not provided) can be installed at points (e).
- 5 Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet [FRIS 18] and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.
- 6 Slip holes (g) in backplate (d) over screws (f) on retainer plate (a).
- 7 Thread ball knobs (c) onto screws (f) and tighten to secure backplate to wall.

[DRAWING 2]

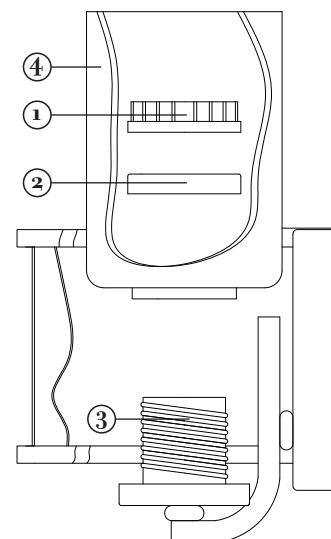

STEP 2

- 1 To install glass, remove socket ring (1) and spacer (2) from socket (3) - See Drawing 2.
- 2 Slip glass (4) over socket (3).
- 3 Slip spacer (2) over socket (3) and then thread on the socket ring (1) to secure the glass. Use caution not to over tighten the socket ring, over tightening may cause damage.



FREDRICK RAMOND

ESTABLISHED 1965

800.421.3517 WWW.FREDRICKRAMOND.COM

6.11.10